


# Malzburg® Modellbau

If it should be something special!

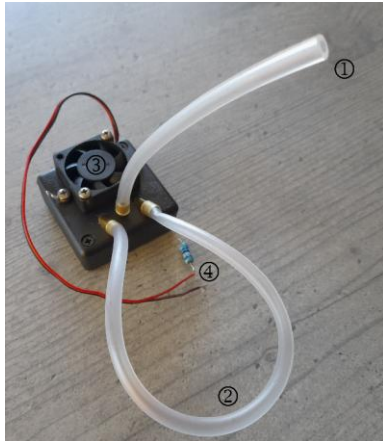

- 1. filling hose
- 2 hoses to the exhaust
- 3 Ventilator
- 4 Wiring with resistance

## Strong smoke modules - installation and operating instructions

### Installation

Install the powerful smoke module firmly in your vehicle and ensure there is sufficient air supply at the Ventilator. Guide the filling hose (1) outwards on the model in a concealed place. Cut the hose for the exhaust (2) in the middle and connect it to the exhaust.

### Connection to the ELMOD:

First remove the resistor (blue on 4). Install 2 female connectors compatible for ELMOD (usually included in ELMOD package). 1. Plug into existing cable (4), note polarity! 2. Plug with cable to the two contacts of the smoke module (silver contacts left and right / polarity does not matter). Now connect to the ELMOD, the contacts are described in the ELMOD instructions.

### First commissioning:

Fill the high-performance smoke module with the help of a syringe through the filling hose with approx. 1-2 ml of commercially available lamp oil. Now you can use the smoke module and, depending on usage, you will see smoke coming out of your model's exhaust for a while.

A sign of an empty oil tank is that light smoke escapes from the filling hose. Please switch off the module **immediately** and fill the module again.

If you use your model again, you can suck out the existing oil with a syringe through the filling hose if you no longer know whether and how much oil is in the smoke module!

If you follow all the instructions, you should be able to enjoy this module for a very long time!

If you have any questions about the smoke module or other technical problems, please write to us at [service@malzburgshop.de](mailto:service@malzburgshop.de).

We do not have a 24-hour telephone line!